

# Segmentni T-komad STK

- ✓ Visokokvalitetni hladnovaljani čelični pocinkovani lim DX51D za hladno oblikovanje
- ✓ U skladu sa standardima MEST EN 1506 i MEST EN 12237
- ✓ Dostupno u "SAFE" izvedbi sa dvostrukom gumenom zaptivkom od EPDM gume koja omogućava nepropusan spoj
- ✓ Dostupno u izolovanoj verziji sa termičkom izolacijom K-FLEX ST, u debljinama 6,10,13 i 19mm
- ✓ Primjer označavanja




STK






STK-Z



STK-Z-I

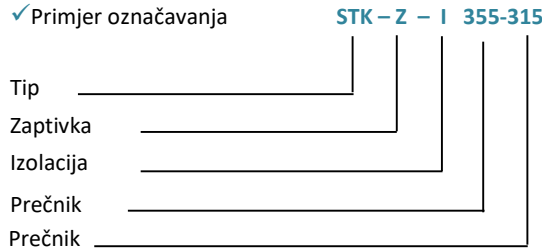

Kataloška oznaka	d <sub>1</sub> [mm]	d <sub>3</sub> [mm]																Dužina lp [mm]	Dužina Lp1 [mm]	Debljina lima δ [mm]					
		100	125	150	160	180	200	250	300	315	355	400	450	500	560	630	710				800	900	1000	1120	1250
STK D <sub>1</sub> - D <sub>3</sub>	100	x																					30	55	0,5
STK D <sub>1</sub> - D <sub>3</sub>	125	x	x																				30	55	
STK D <sub>1</sub> - D <sub>3</sub>	150	x	x	x																			35	55	
STK D <sub>1</sub> - D <sub>3</sub>	160	x	x	x	x																		35	55	
STK D <sub>1</sub> - D <sub>3</sub>	180	x	x	x	x	x																	40	55	
STK D <sub>1</sub> - D <sub>3</sub>	200	x	x	x	x	x	x																40	55	
STK D <sub>1</sub> - D <sub>3</sub>	250	x	x	x	x	x	x	x															45	55	
STK D <sub>1</sub> - D <sub>3</sub>	300	x	x	x	x	x	x	x	x														50	75	0,7
STK D <sub>1</sub> - D <sub>3</sub>	315	x	x	x	x	x	x	x	x	x													50	75	
STK D <sub>1</sub> - D <sub>3</sub>	355				x	x	x	x	x	x	x												60	75	
STK D <sub>1</sub> - D <sub>3</sub>	400				x	x	x	x	x	x	x	x											65	75	
STK D <sub>1</sub> - D <sub>3</sub>	450						x	x	x	x	x	x	x										70	75	
STK D <sub>1</sub> - D <sub>3</sub>	500							x	x	x	x	x	x	x									75	75	
STK D <sub>1</sub> - D <sub>3</sub>	560								x	x	x	x	x	x	x								80	75	
STK D <sub>1</sub> - D <sub>3</sub>	630									x	x	x	x	x	x	x							85	75	
STK D <sub>1</sub> - D <sub>3</sub>	710										x	x	x	x	x	x	x						90	95	1
STK D <sub>1</sub> - D <sub>3</sub>	800											x	x	x	x	x	x	x					100	95	
STK D <sub>1</sub> - D <sub>3</sub>	900												x	x	x	x	x	x					110	95	
STK D <sub>1</sub> - D <sub>3</sub>	1000													x	x	x	x	x	x				120	95	
STK D <sub>1</sub> - D <sub>3</sub>	1120														x	x	x	x	x	x			130	95	
STK D <sub>1</sub> - D <sub>3</sub>	1250															x	x	x	x	x	x		140	95	

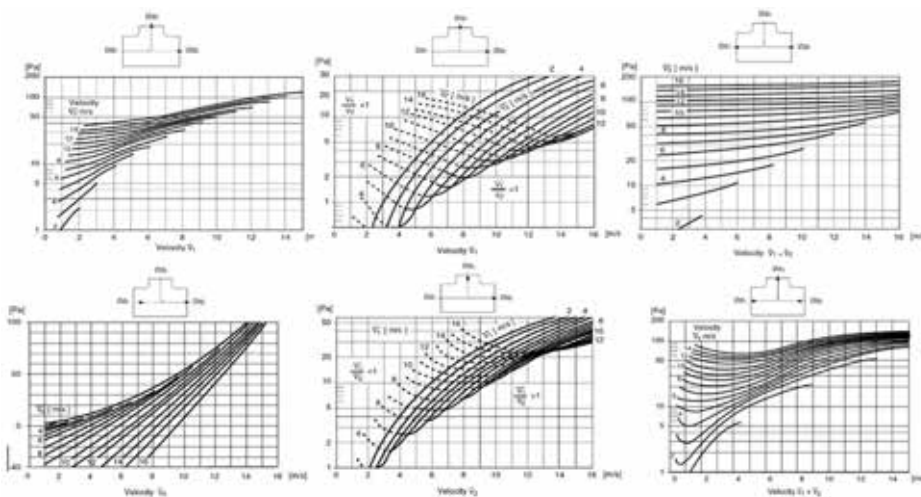

$\varnothing d_1 \geq \varnothing d_3; l_1 = \varnothing d_3 / 2 + 30$   
 $mm; l_3 = \varnothing d_1 / 2 + 30$  mm